UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NE	V BRUNSWI	CK
NIII	TINA	

NOVA SCOTIA YUKON

PRINCE EDWARD ISLAND NORTHWEST TERRITORIES NEWFOUNDLAND AND LABRADOR

Aalberts integrated piping systems APAC Inc. MANUFACTURERS NAME: No. 295, Sec. 3, Wandan Road, Wandan Township, Pingtung, Taiwan R.O.C. MANUFACTURERS ADDRESS: As above PLANT LOCATIONS: CATEGORY OF FITTINGS TO BE REGISTERED. CIRCLE ONE CATEGORY ONLY TITLE OF THE STANDARD OF CONSTRUCTION ASME B31.3 Pipe fittings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or reducers B Flanges: all flanges C Valves: all line valves D Expansion joints, flexible connections, and hose assemblies: all types E Strainers, filters, separators, and steam traps F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters G Certified capacity-rated pressure relief devices acceptable as primary over pressure protection on boilers, pressure vessels, piping and fusible plugs H Pressure retaining components that do not fall into one of the above categories N Nuclear components: Class 1 ☐ Class 2 ☐ Class 3 ☐, (Meeting CNSC or ASME requirements) TYPE OF CONSTRUCTION SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT FORGED | WELDED | WROUGHT | CAST | OTHER | DESCRIBE OTHER

LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE REGISTERED:

- LRQA certificate of approval No: ISO 9001 0068440
- Renew 0B1967.7C.
- See document "CRN Registration" dated Oct. 30, 2020, drawings & proof test records.

			N:	

CHIU. YING - CHUAN (see note 3) employed by Authorits integrated piping systems APAC Inc. and being the person having full authority and responsibility for the quality of the end product do solemnly declare that the information contained in this form is true and to the best of my knowledge represents the product for which registration is sought. The dimensions, materials of construction, pressure temperature ratings, and identification markings are in accordance with the herein named standards. I further declare that the manufacture of these fittings is regulated by a Quality Control Program which extends to each plant where fabrication occurs in whole or in part and has been verified by LRQA certificate No. ISO 9001 - 0068440 as being suitable for that purpose and I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under path.

Signature of Declarer:	CHIU, YING	CHUAN
Declared before me at	Kachslung.	
This >0 A day	of Navembet	AD 2020

USETHIS SPACE FO . OFFICIAL BEAL

Commissioner of Oaths or Notary Public: (sign)

This registration must be revalidated after ten (10) years from the date of acceptance.

CRN: 0B1967.7 Rev2


16031 FID#:

Rev. is CRN renewal and company name change from Shurjoint to Aalberts Integrated Piping Systems APAC Inc. CDI Fig. adapter **Notice** pper tubing; SS Fig. adapters; SS & CDI Univ. fig. adapters;

- 1. All fittings shall be registered in the name of the Manufacturar.
- 2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation.
- 3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product.
- 4. Quality control programs shall be resubmitted for validation

at a maximum interval of five (5) years,

CDI fig. adapters - Cl.300; CDI fig. adapters; CDI Univ. reducing fig. adapters.

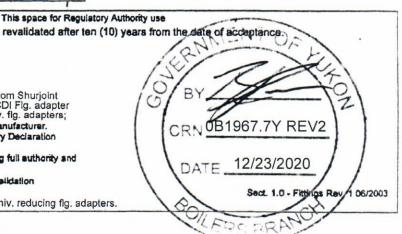

CRN Registration

Shurjoint Grooved Components are to be registered (Category B - Flanges)

Model Number	Size Range (inch)	Rated Pressure (psi)	Service Temperature	Drawings
7170 Flange Adapter	2~8	300	$-20^{\circ}\text{F} \sim +180^{\circ}\text{F}$ $(-29^{\circ}\text{C} \sim +82^{\circ}\text{C})$	170
7180 Universal Flange Adapter	2 ~ 8	300	-20°F ~ +180°F (-29°C ~ +82°C)	180
7181 Universal Reducing Flange Adapter	3 x 2, 4 x 2½, 4 x 3, 6 x 4	125	-20°F ~ +180°F (-29°C ~ +82°C)	1AG
7041	2 ~ 6	300	EPDM:	77.1.0.1
Flange Adapter	10 ~ 12	175	$-20^{\circ}\text{F} \sim +180^{\circ}\text{F}$ $(-29^{\circ}\text{C} \sim +82^{\circ}\text{C})$	HA104a
7043 Flange Adapter - ANSI Class 300	2, 21/2, 3, 4, 5, 6, 8, 10, 12	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-7043 H143 G14a 7041HB
SS-41 Flange Adapter	2, 2½, 3, 4, 6, 8	175	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SS41 H1SG G14a 7041HB
SS-80 Stainless Steel Universal Flange Adapter	2, 21/2, 3, 4, 5, 6, 8	250	-20°F ~ +180°F (-29°C ~ +82°C)	189
C341 Flange for Copper Tubing	2, 21/2, 3, 4, 5, 6	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-C341 1C5 GC5 7041HB