


Standard Roll Groove Dimensions for U.S. Standard Copper Tubing

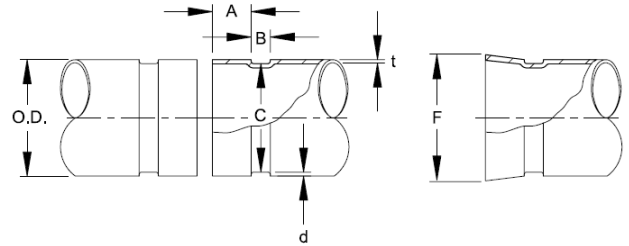

1	2	3	4	5	6	7	8
Nominal Size	Pipe O.D. Basic Size	Gasket Seat $\pm 0.03 / \pm 0.79$	Groove Width $\pm 0.03 / \pm 0.79$	Groove Dia. $+0/-0.02 / +0/-0.51$	d Groove Depth (ref.)	t Min. Allowed Wall Thick.	F Max. Allowed Flare Dia.
in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm
2 50	2.125 54.0	0.610 15.5	0.300 7.6	2.029 51.5	0.048 1.2	0.064 1.6	2.220 56.4
2½ 65	2.625 66.7	0.610 15.5	0.300 7.6	2.525 64.1	0.050 1.3	0.065 1.7	2.720 69.1
3 80	3.125 79.4	0.610 15.5	0.300 7.6	3.025 76.8	0.050 1.3	DWV	3.220 81.8
4 100	4.125 104.8	0.610 15.5	0.300 7.6	4.019 102.1	0.053 1.4	DWV	4.220 107.2
5 125	5.125 130.2	0.610 15.5	0.300 7.6	4.999 127.0	0.053 1.4	DWV	5.220 132.6
6 150	6.125 155.6	0.610 15.5	0.300 7.6	5.999 152.3	0.063 1.6	DWV	6.220 158.0

Pipe O.D. (Column 2):

Maximum allowable tolerances from square cut ends is 0.03" for 2" thru 3"; 0.045" for 4" thru 6"; and 0.060" for sizes 8".

Gasket Seating Surface (Column 3):

The gasket seating surface shall be free from deep scores, marks, or ridges that would prevent a positive seal.

Groove Width (Column 4):

Groove width is to be measured between vertical flanks of the groove side walls.

Groove Diameter (Column 5):

The "C" diameters are average values. The groove must be of uniform depth around the entire pipe circumference.

Groove Depth (Column 6):

The "d" is for reference use only. The groove dimension shall be determined by the groove diameter "C".


Minimum Wall Thickness (Column 7):

The DWV pipe (ASTM B-306) is minimum wall thickness that may be roll grooved.

Flare Diameter (Column 8):

The pipe end that may flare when the groove is rolled shall be within this limit when measured at the extreme end of the pipe.

Standard Roll Groove Dimensions for British Standard Copper Tubing

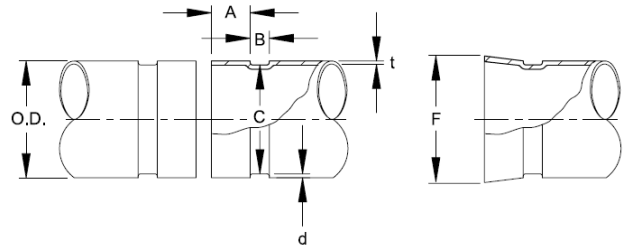

Nominal Size	1 Pipe O.D.		2	3	4	5	6
	Min.	Max.	A Gasket Seat ±0.8	B Groove Width +0.8 / -0	C Groove Dia. +0/-0.5	d Groove Depth (ref.)	F Max. Allowed Flare Dia.
mm	mm	mm	mm	mm	mm	mm	mm
54.0	53.99	54.07	15.87	7.6	51.53	1.25	56.39
66.7	66.60	66.75	15.87	7.6	64.14	1.27	69.09
76.1	76.15	76.30	15.87	7.6	73.53	1.35	78.61
108.0	108.00	108.25	15.87	7.6	104.93	1.60	110.54
133.0	133.25	133.50	15.87	7.6	129.67	1.85	135.79
159.0	159.25	159.50	15.87	7.6	155.68	1.85	161.80

Pipe O.D. (Column 1):

Maximum allowable tolerances from square cut ends is 0.03" for 2" thru 3"; 0.045" for 4" thru 6"; and 0.060" for sizes 8".

Gasket Seating Surface (Column 2):

The gasket seating surface shall be free from deep scores, marks, or ridges that would prevent a positive seal.

Groove Width (Column 3):

Groove width is to be measured between vertical flanks of the groove side walls.

Groove Diameter (Column 4):

The "C" diameters are average values. The groove must be of uniform depth around the entire pipe circumference.

Groove Depth (Column 5):

The "d" is for reference use only. The groove dimension shall be determined by the groove diameter "C".

Flare Diameter (Column 6):

The pipe end that may flare when the groove is rolled shall be within this limit when measured at the extreme end of the pipe.

Note:

- **Shurjoint** reserves the right to change specifications, designs and or standard equipment without notice and without incurring any obligations.